



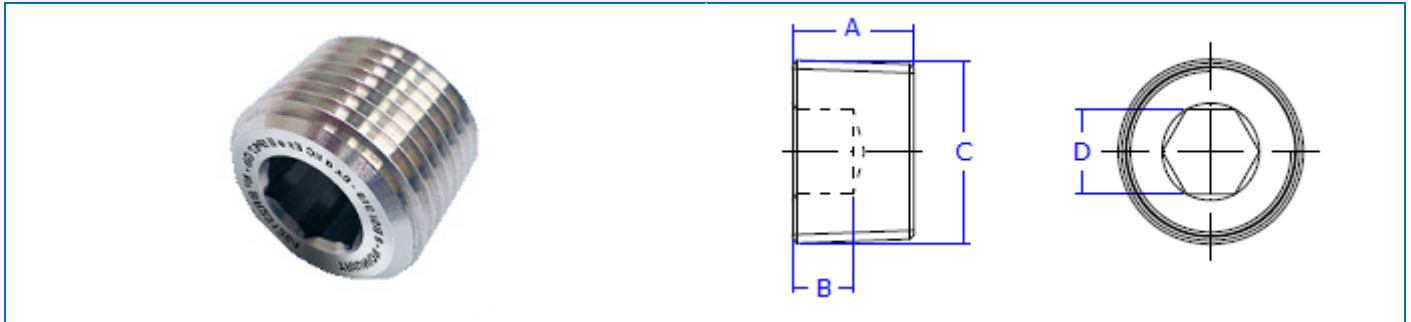

BSI – Internal Hex Pipe Plug

(Explosive Atmospheres)

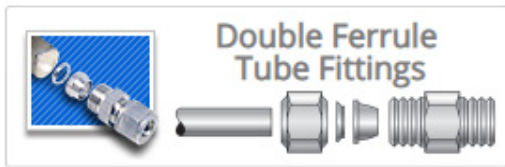

PART NUMBER		DIMENSIONS*				EXPLOSIVE ATMOSPHERES
CARBON	SS 316	A	B	C	D	
8 BSI S	8 BSI 316	14,00	7,00	1/2" NPT	3/8"	IP-66 / IP-67
8 BSI-EX S ⁽¹⁾	8 BSI-EX 316 ⁽¹⁾	14,00	7,00	1/2" NPT	3/8"	

CERTIFIED BVQI NUMBER BR231264 (EXPLOSIVE ATMOSPHERES "IP-66 / IP-67")

*Dimensions are for reference only and are subject to change. ⁽¹⁾ Choice conicity thread NPT 7/8" or 3/4"

OPTIONALS & KEY FEATURES	
SIZE RANGES FROM 1/16" THROUGH 1"	FERRULES OF ARMCO 17-4 PH OR DELRIN
FITTINGS ARE STANDARD IN SS 316, BRASS OR CARBON STEEL	AVAILABLE WITH NPT, BSP OR BSP + O'RING VITON
FOR FRACTIONAL TUBE TO METRIC TUBE (INCHES OR MILLIMETERS)	CAN BE USED WITH A WIDE VARIETY OF TUBING MATERIALS INCLUDING PLASTIC OR GLASS TUBES.


STANDARDS TUBE FITTINGS / ADAPTER FITTINGS

DIMENSIONS	MALE/EXTERNAL	SAE J 514
	FEMALE/INTERNAL	SAE J 1926
	SW	ASME B 16.11
	JIC 37 ^e	SAE J 514
	NPT THREADS	ASME B 1.20.1
	BSP THREADS	DIN ISO 228



BSI – Internal Hex Pipe Plug

(Explosive Atmospheres)

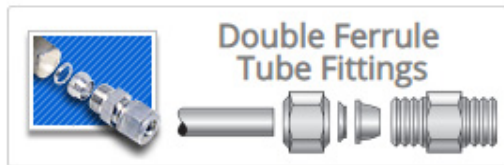

RAW MATERIAL	MATERIALS STANDARDS		ASME B 31.3
	SS 316	BAR STOCK	ASTM A 276
		CF8M	ASTM A 351
	CARBON	BAR STOCK	NBR NM 87 NBR 11294 ASTM A 108
		WCB	ASTM A 216
	BRASS	BAR STOCK	ASTM B 16
		FORGINGS	ASTM B 124 ASTM A 377 ASTM B 283
	ARMCO 17-4 PH - TP 630		ASTM A 564
DELTRIN (POLYACETAL)		ASTM D 4181 ASTM D 792 (ACETALS)	
PROCESS	SILVER-PLATING APPLIED TO THE INTERNAL SURFACE OF THE NUT (SS 316)		TRIUNION'S INTERNAL STANDARD
	ZINC-NICKEL PLATTING		ASTM B 841-99
PRESSURE	TESTING	MSS-SP-25 MSS-SP-83	
	RATINGS	ASME B 31.1 ASME B 31.3	