



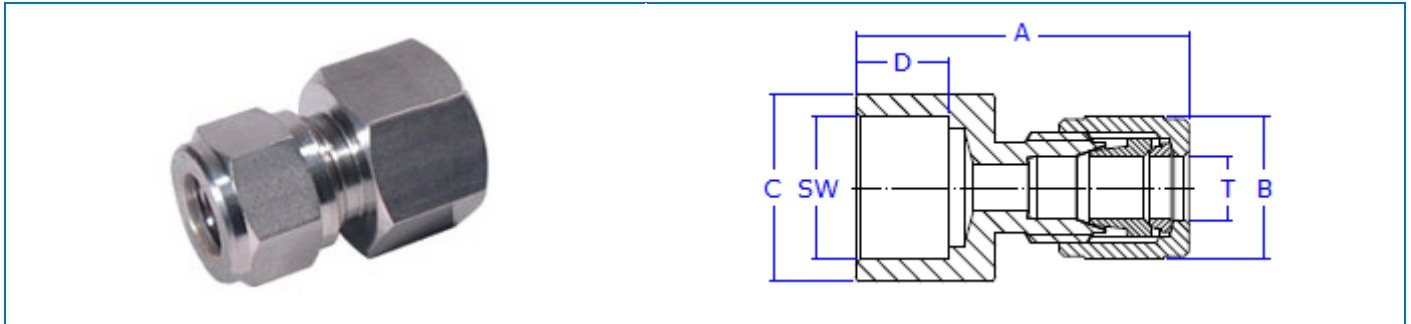

CFSW – Socket Weld Connector


(pipe schedule)

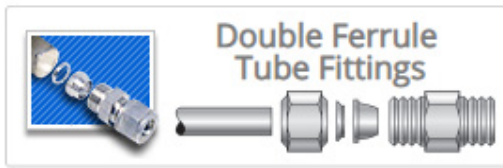

PART NUMBER		TUBE O.D. - T		TUBE - SW		DIMENSIONS*			
CARBON	SS 316	INCHES	MM	POL.	MM	A	B	C	D
2 CFSW 2 S	2 CFSW 2 316	1/8"	3,18	1/8"	10,24	31,81	11,11	14,28	9,50
4 CFSW 4 S	4 CFSW 4 316	1/4"	6,35	1/4"	13,72	33,86	14,28	19,05	9,50
6 CFSW 6 S	6 CFSW 6 316	3/8"	9,53	3/8"	17,15	34,48	17,46	22,22	9,50
8 CFSW 8 S	8 CFSW 8 316	1/2"	12,70	1/2"	21,34	40,96	22,22	26,99	9,50
12 CFSW 12 S	12 CFSW 12 316	3/4"	19,05	3/4"	26,67	44,85	31,75	34,92	12,50
16 CFSW 16 S	16 CFSW 16 316	1"	25,40	1"	33,40	46,06	38,10	41,27	12,50


*Dimensions are for reference only and are subject to change.

OPTIONALS & KEY FEATURES	
SIZE RANGES FROM 1/16" THROUGH 1"	FERRULES OF ARMCO 17-4 PH OR DELRIN
FITTINGS ARE STANDARD IN SS 316, BRASS OR CARBON STEEL	AVAILABLE WITH NPT, BSP OR BSP + O'RING VITON
FOR FRACTIONAL TUBE TO METRIC TUBE (INCHES OR MILLIMETERS)	CAN BE USED WITH A WIDE VARIETY OF TUBING MATERIALS INCLUDING PLASTIC OR GLASS TUBES.

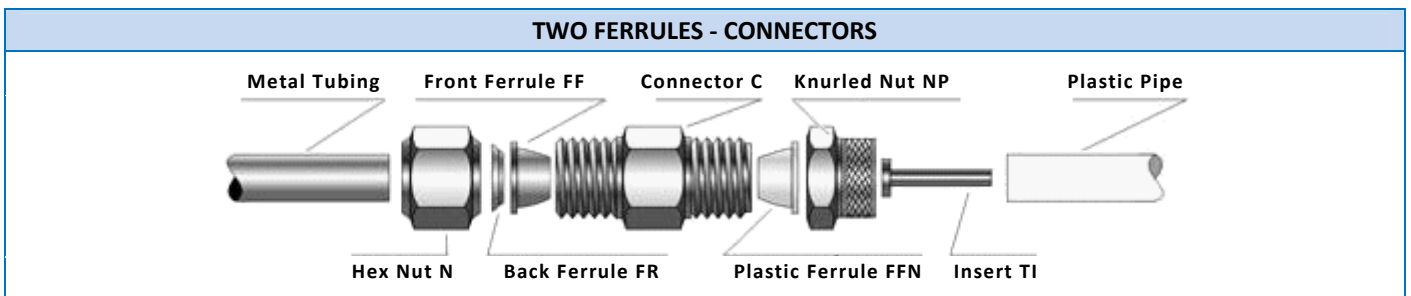

CFSW – Socket Weld Connector

(pipe schedule)

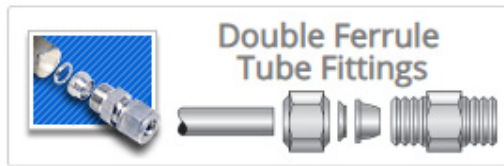

STANDARDS

TUBE FITTINGS / ADAPTER FITTINGS

DIMENSIONS	MALE/EXTERNAL		SAE J 514
	FEMALE/INTERNAL		SAE J 1926
	SW / BW		ASME B 16.11 / ASME B 16.9
	JIC 37°		SAE J 514
	NPT THREADS		ASME B 1.20.1
	BSP THREADS		DIN ISO 228
RAW MATERIAL	MATERIALS STANDARDS		ASME B 31.3
	SS 316	BAR STOCK	ASTM A 276
		CF8M	ASTM A 351
	CARBON	BAR STOCK	NBR NM 87 NBR 11294 ASTM A 108
		WCB	ASTM A 216
		BAR STOCK	ASTM B 16
	BRASS	FORGINGS	ASTM B 124 ASTM A 377 ASTM B 283
		ARMCO 17-4 PH - TP 630	ASTM A 564
DELTRIN (POLYACETAL)		ASTM D 4181 ASTM D 792 (ACETALS)	
PROCESS	SILVER-PLATING APPLIED TO THE INTERNAL SURFACE OF THE NUT (SS 316)		TRIUNION'S INTERNAL STANDARD
	ZINC-NICKEL PLATING		ASTM B 841-99
PRESSURE	TESTING		MSS-SP-25 MSS-SP-83
	RATINGS		ASME B 31.1 ASME B 31.3